

ABLOY[®] PROTEC²

EUROPROFILE DIN CYLINDERS




ABLOY® PROTEC²




ABLOY® PROTEC² DIN EUROPROFILE DOOR CYLINDERS ARE USED IN LOCK CASES CONFORMING TO DIN STANDARD 18251.


SINGLE CYLINDERS
CY321T (31), CY331T (32)
CY326T (36), CY336T (37)



DOUBLE CYLINDERS
CY322T (31), CY332T (32)
CY327T (36), CY337T (37)



CYLINDER WITH THUMBTURN
CY323T (31), CY333T (32)
CY328T (36), CY338T (37)

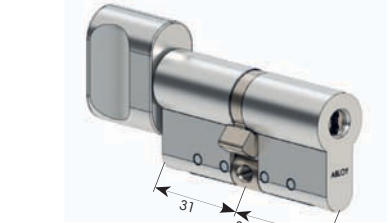

SECURITY CYLINDER RINGS




CH101 for wooden doors




CH102 for narrow stile doors

CAMS:


808050
Cam 9mm




808810
Cam 7,5mm




812264
Cam thin




814037 *)
Lazy cam



814823 **)
Gear cam with 10 teeth



812504 **)
Gear cam with 10 teeth



FINISHES AVAILABLE



Bright Chrome



Satin Chrome



Satin Brass




Bright Brass



Brushed Nickel


EXTENSION PIECE SYSTEM:

The modular extension piece system enables easy adjustment of the cylinder length even during installation. Cylinder length is adjustable in 5mm increments up to 50mm extension and in 10mm increments up to 100mm extension.



CAM POSITION:

Easily adjustable cam enables eight different cam positions to allow different lock case functions.



*) 120° free movement

**) Options: Solid or 35° free movement

CONSTRUCTION

Cylinder housing	CY320 series Brass
Cylinder housing	CY330 series exterior housings
	Case Hardened Steel
Cylinder drum	Brass
Discs and washers	Tin bronze
Number of discs	11



www.abloy.com

Abloy Oy
Wahlforssinkatu 20
P.O. Box 108
FI-80101 JOENSUU
FINLAND
Tel. +358 20 599 2501
Fax +358 20 599 2209

